

# MF RB SERIES

# **Fixed Chamber Round Balers**



# Contents



#### Page 06

High speed pick-up



#### Page 08

Hydroflexcontrol - two stage protection system



#### Page 09

Bale chamber



Page 15

Monitoring and Control



Page 16

Experience, innovation and durability

- High quality fodder and straw
- 04 Fixed Chamber range
- O5 A closer look at the MF RB Series fixed chamber round balers
- 06 High speed pick-up
- 07 Xtracut for optimum cutting performance
- 18 Hydroflexcontrol two stage protection system
- 09 Bale chamber
- 10 Wrapping options
- 11 Monitoring and Control
- 12 Experience, innovation and durability
- 13 Customer support
- 15 Specifications & Options



features and innovations.

New-style side panels enhance ergonomics and numerous improvements under the covers improve performance and bale quality.

Enhancing our baler range to precisely meet the needs of farmers and contractors is our goal, offering solutions to suit their end use or market requirements, their crops, and their terrain.

Consistent bale density is essential for all baled products, and the new range of MF fixed chamber round balers offer farmers the best solution due to their class-leading compaction, cutter and pick-up capabilities. As a result, they are the ideal choice for those looking for high throughput and quality fodder or straw.

In hay, straw and biomass, the MF RB Series Balers form dense bales which are easy to handle and stack. They also retain their quality for a long period of time.

The MF fixed chamber round balers are therefore suitable for a diverse range of farms and contracting businesses, including mixed, arable and livestock.

# MF RB Series Round Balers Fixed Chamber range





#### MF RB 3130F

- Reliable and high performing baler producing high density hay or straw bales
- Wide, 2.25m or 2.4m (optional) pick-up and packer rotor ensures optimum capacity in the most demanding crops
- 1.5cu.m bale chamber with 18 Powergrip rollers and mechanical tail-gate lock ensures consistent bale shape and density.

#### MF RB 3130F Xtracut

- Reinforced for maximum output and durability demanded by professional operations and contractors
- The Xtracut cutter features options of 13, 17 or 25 knives, guaranteeing consistent chopping
- Selectable knife banks on Xtracut 17 and 25 provide consistent efficiency and various cutting settings
- Increased diameter roller shafts and heavy-duty greasable bearings in the bale chamber are able to withstand peak loads
- The E-Link control system features a number of baler functions activated from the cab for increased comfort & ease of use for the operator.

# A closer look at the MF RB Series fixed chamber round balers

Special Powergrip rollers ensure constant grip for best bale shape and appearance

NEW: Mechanical tail gate locks with pressure sensors help to maintain bale shape

stage anti-blockage system

Automatic chain lubrication reduces maintenance time

MASSEY FERGUSON RB 3130F **Proven Varionet** wrapping **Powersplit gearbox ensures** optimum power distribution Xtracut cutter - flexible choice for cut length Camless pick-up - high speed feeding with low maintenance Hydroflexcontrol - time saving two

# High speed pick-up

Higher operating speeds are possible with the Massey Ferguson camless pick-up design.

With fewer moving parts, the camless pick-up is quieter, simpler and more reliable. Low maintenance and less adjustments save time and increase productivity.

The pick-up system has five tine bars with each one being spaced only just 64mm apart, providing higher capacity and a smoother even feed at high speed.

On the Massey Ferguson round balers, the pick-up is positioned very closely to the rotor, therefore improving crop flow and reducing the risk of blockage.




#### **Crop press roller option**

A reinforced crop press roller equipped with rake is available, to enhance crop flow into the chamber.



#### Feeding augers

Two large capacity 25cm diameter feeding augers direct crop to the centre to create best bale shape.

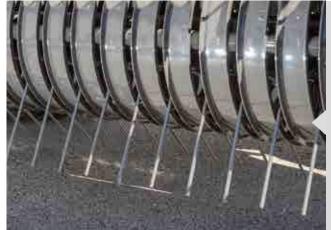

#### Heavy duty tines

Five rows of heavy duty tines with large coil diameter for enhanced durability in silage and stony conditions.

# Xtracut for optimum cutting performance

Chopping silage whilst baling offers several benefits:


- Improves forage quality resulting in better fermentation and palatability
- Saves time allowing a faster distribution of silage
- Reduces waste during feeding
- Helps to achieve greater density thus reducing haulage and wrapping costs

Designed for optimum performance, Massey Ferguson **Xtracut** can be equipped with 13, 17 or 25 knives. Cutter units are fitted with the longest knives on the market, making sure that no material will pass through uncut.


**Xtracut** 17 and 25 feature two sets of hydraulically operated knife banks with separate control from the cab depending on customer requirements.

#### The operator can select:

- A single knife bank
- Both knife banks
- Disengagement of all knives

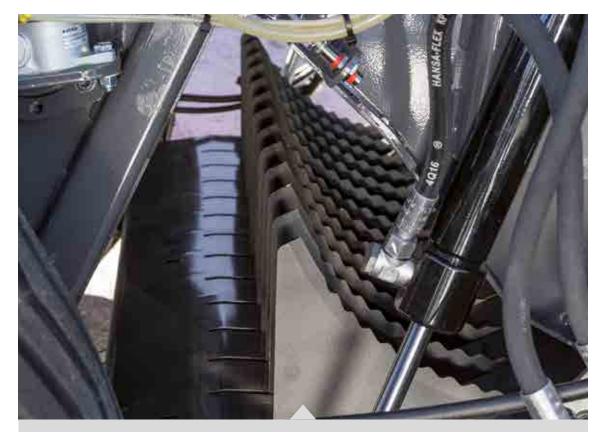

The MF RB 3130F can be equipped with an **Xtracut** with either 13, 17 or 25 knives.

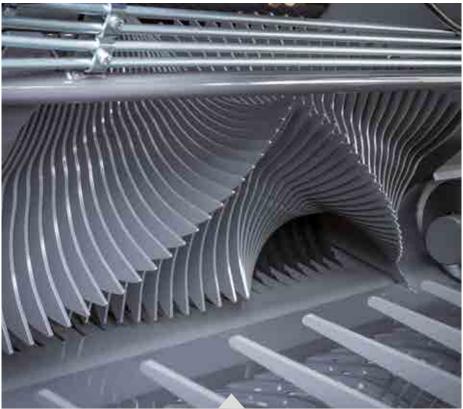

25 knife cutter.


# **Hydroflexcontrol** - Two stage protection system

Racing against weather and time to gather the best quality crop is always a challenge for man and machine.

To maximise efficiency in the field and minimise downtime from crop blockages, the \*MF Round balers are fitted with the unique Hydroflexcontrol protection system which works in two stages:

**Stage 1.** Automatic mechanical floor cushioning to clear minor blockages

**Stage 2.** Hydraulically controlled floor lowering to clear major blockages

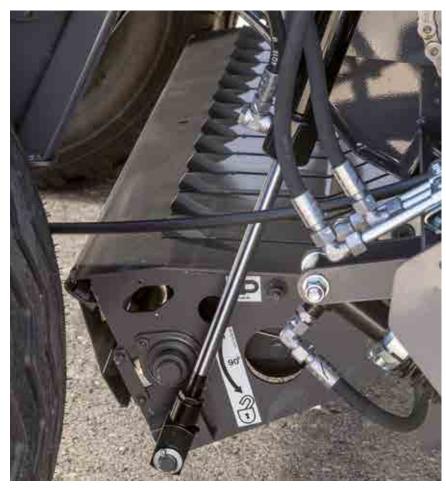

<sup>\*</sup> Standard on MF 3130F Xtracut and MF 3130F Protec

The first stage of Hydroflexcontrol allows movement of the front part of the feed chamber floor and will automatically prevent up to 80% of potential blockages and will keep you going without unnecessary downtime.

Should a major blockage occur, stage two of Hydroflexcontrol is activated by the operator, and is cleared by lowering the rear of the feed table floor hydraulically from the cab, allowing for material to easily pass through, therefore minimizing downtime.

Stage 1





The patented protection system prevents peak loads from turning into blockages by a gentle lowering of the floor which is suspended on rubber blocks or steel springs, depending on the model.

Stage 2





In the event of a blockage the operator can easily open the feed table floor and lower the knives at the same time to provide enough space for material to pass through.

### **Bale chamber**

The bale chamber is made up of 18 Powergrip rollers which ensure an effective grasp and quicker bale rotation for higher density and improved bale shape.

Rollers with 10 ribs are made from a seamless solid tube. They are the industry benchmark for durability and performance, known for their proven design and capability to withstand the harshest environments.

The new, improved chamber has a 'spiral' form with slightly reduced diameter at the front thus improving feeding and bale rotation, increasing density and net grip when wrapping.





The roller support bearings in the bale chamber feature new scrapers, efficiently removing debris and moisture from the roller bearings and keeping the outside panels clean.



The simple, fast and efficient mechanical tail-gate locking device is now enhanced with pressure sensors on both sides and features left-right indication allowing the operator to monitor the outer layers of bale.

# **Wrapping options**

Perfect wrapping of perfectly formed bales is provided by the **Varionet** system, saving cycle time, tying materials and preserving bales for safe handling and storage afterwards.

The tried and tested Varionet net wrapping system features a special net tensioning and spreading device that is capable of dealing with various widths and types of net, allowing for fast wrapping of bales from edge to edge or over the edge.



### Monitoring and controls




The E-Link Control unit offered as standard on the Massey Ferguson RB 3130F allows the operator a great overview of the key baler processes with all adjustments made through the monitor. Its High Definition screen provides clear working images.

The following functions can be controlled with the E-Link Control terminal:

- Knife selection
- Bale pressure adjustment
- Bale size adjustment
- Net layer adjustment
- Net start/stop/pause
- Visual bale chamber filling
- Softcore bale on/off
- Bale counter
- Total bale counter
- Customer settings
- Sensor and actuator settings





Specific field or customer information, such as the number of bales or hours worked, can easily be set and collected with the Wizard menu and later exported via a USB connection for easy management of records and further performance analysis.



Both the RB baler and RB Protec baler/wrapper combo versions can be specified with ISOBUS connection for utilising tractor monitors.

Utilising a single in-cab terminal in the tractor for all implements reduces cab clutter and can make for simpler and more accurate control by drivers who may carry out a wide range of operations with different machines.

## **Experience, innovation and durability**

Massey Ferguson is a world leading brand with extensive experience in hay and forage production on all continents.

The Massey Ferguson round baler range is built to last and designed to exceed your expectations...

The number of unique and patented features make our balers stand out from the crowd.






The Powersplit gearbox equally divides and transfers power to drive the rotor unit on one side and the roller drives on the other, reducing the overall power requirement by simplifying the drivelines. This results in a more efficient baler which uses less fuel.



Automatic chain lubrication with individual adjustment for each chain guarantees sufficient oil supply, reduces maintenance time and extends chain service life. For added durability the highest quality chains are used throughout the baler.



The bale chamber can experience extreme loads with forces from all directions. The clever bearing housing design allows some movement of the rollers to eliminate major axial loads occurring during operation.



Regular and sufficient lubrication of roller bearings is extremely important, particularly in adverse conditions, for example when baling silage. Centralized grease banks for roller bearing lubrication are located in convenient positions for easier access and reduced service time.

# **Parts & Service**

It's all about a lifetime of support



Buying, owning, and maintaining farm machinery can be complex, so having absolute peace of mind that you have great back-up and support is a hugely important consideration. As a Massey Ferguson customer you are assured of personalised, responsive, and friendly support from our network of expert dealers who truly understand your business.

There is no cut-off time for Parts and Service because a machine may be out of service. We are available to you throughout your ownership of your Massey Ferguson machine.

Our Dealers are committed to finding the right product for you and then supporting you with the best service, parts provision and backup. You'll be part of a dedicated family of highly skilled specialists who make it their business to give you genuine, top quality service support.

We take great pride and responsibility in every machine we sell and we make it our mission to keep your machinery running reliably, every time you turn the key.

# Specifications as standard

Model	MF RB 3130F	MF RB 3130F Xtracut
Bale Chamber		
Diameter, m	1.25	1.25
Width, m	1.23	1.23
Volume, m <sup>3</sup>	1.50	1.50
Mechanical chamber locking	•	•
Varionet net wrapping	•	•
Bale ramp	0	•
Pick-up		
Width, m	2.25	2.25 / 2.40
Tine to tine width, m	1.86	1.86 / 2.11
Pick-up tine spacing, mm	64	64
Press roller with rake	•	•
Feeding		
Feeder Rotor	•	_
Xtracut, 13-knife cutter	_	0
Xtracut, 17-knife cutter	_	0
Xtracut, 25-knife cutter	_	0
Hydroflexcontrol	_	•
Monitoring		
E-Link monitor	•	•
E-Link Pro	-	0
Tractor requirements		
Recommended horsepower, kW/HP	52 / 70	64 / 85
PTO, rpm	540	540
Hydraulic spool valves	2	2
		15.0/55-17
T	15.0/55-17	19/45-17 (standard)
Tyre options	19/45-17 (standard) 500/55-20	500/55-20 500/60-22.5
	500/55-20	500/60-22.5 V-Shape
		300/00-22.3 ν-3παρο
Dimension and weights		
Transport length, m	4.30	4.30
Transport height, m	2.60	2.60
Transport width, m	2.70	2.70
Approximate weight, kg	3,000	3,200
,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	-,-,-	-,
Options		
Autolube roller bearing lubrication	-	0
Air brakes	0	0
		0

- Not available
- Standard specification
- Optional C

Every effort has been made to ensure that the information contained in this publication is as accurate and current as possible. However, inaccuracies, errors or omissions may occur and details of the specifications may be changed at any time without notice. Therefore, all specifications should be confirmed with your Massey Ferguson Dealer or Distributor prior to any purchase.















Web: masseyferguson.com/en\_za/

Facebook: www.facebook.com/MasseyFergusonSA

Twitter: Twitter.com/MF\_EAME

Instagram: Instagram.com/MasseyFergusonGlobal YouTube: www.YouTube.com/MasseyFergusonGlobal

Blog: Blog.MasseyFerguson.com

AGCO South Africa Marketing 16 Pomona Road, Kempton Park, Gauteng, 1619



AGCO MASSEY FERGUSON® is a worldwide brand of AGCO. Your Agriculture Company 
© AGCO South Africa | 17355 | English